

Lamp Type: G48T5LCA/C


Spec Number:

1098

Engineering Specification Sheet


Lamp Diagram:

Single Pin Lamp

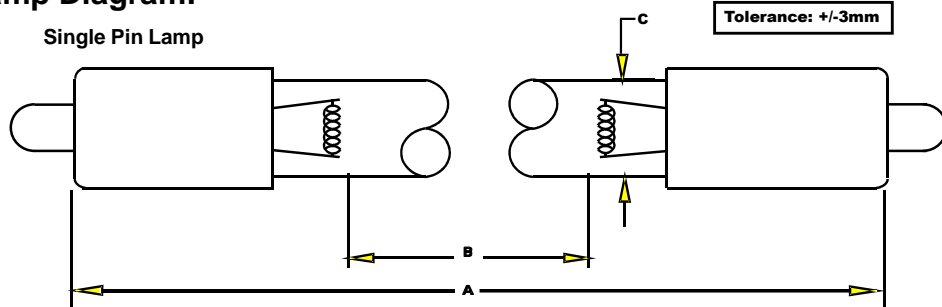

A08-60-CP0 HD Single Pin Base


Left Base Diagram:

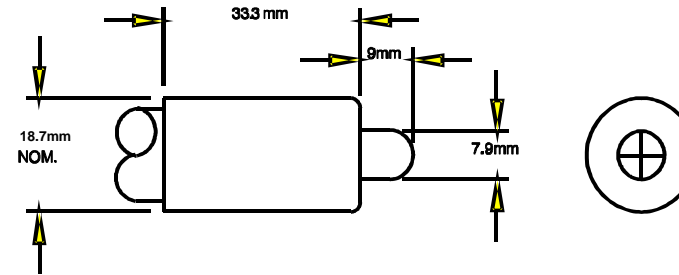

Pin: 08-PN-007

A08-60-CP0 HD Single Pin Base

Right Base Diagram:

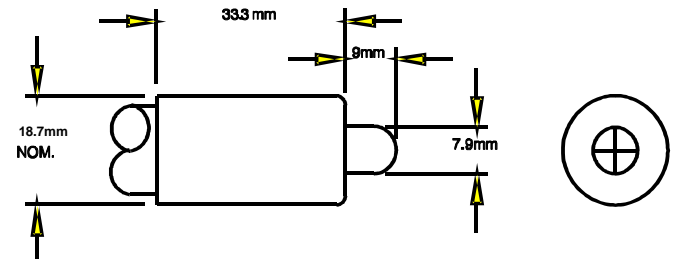

Pin: 08-PN-007

Lamp Characteristics

(A) Base Face:	1148	mm	+/- 3mm		
(B) ARC:	1072	mm		Operating Current	465mA
(C) Bulb Diameter	15	mm		Lamp Voltage:	132V
(X)				Lamp Wattage:	60W
Glass Type:	L (Non Ozone)	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				
	(Y1)				

UV Output - Certified to be true. First Light Technologies, Inc.

Output UVC Watts	micro/watt	/cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
19		190	12000	80.00%		TB-004

First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

6/15/2022
 12:27:28 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.